
## Altimeter Antenna S67-2002-19



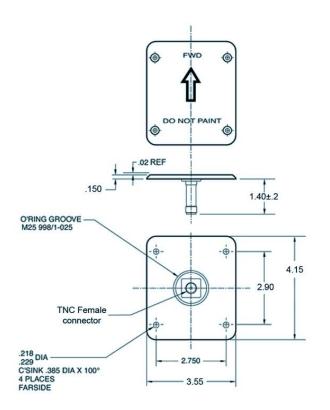

Please Note: For REFERENCE ONLY Contact Sensor Systems for latest drawing

## Description

**S67-2002-19:** Altimeter Antenna S67-2002-19: Thin, flush-mounted radio altimeter antenna designed to provide improved performance as well as to reduce size and weight. Small size provides ease of mounting and is ideal for General Aviation and ARINC equipment. The antenna is smaller and lighter than exhisting horns. Requires mounting with four 10-32 screws. Unit is interchangeable with Collins, Bendix, Sperry, Honeywell, and TRT Systems. Also compatible with Fokker application, F50-100.

NSN: 5985-01-424-4935

FEDERAL & MILITARY SPECS: FAA TSO-C87, ARINC 708/552, MIL-E-5272C, MIL-E-5400, RTCA DO-160.

Electrical	
Frequency	4200 - 4400 MHz
VSWR	≤ 1.5:1 (4275-4325 MHz) ≤ 2.3:1 (4200-4400 MHz)
Gain	9.5 dBi
Polarization	Linear
Impedance	50 Ω
Power	5 Watts Average 500 Watt Peak
Beam Width	Roll Plane 45° Min. (E) Pitch Plane 40° Min. (H)
Sideload Level	-40dB
Mechanical	
Mechanical Weight	0.25 lbs.
	0.25 lbs. 0.15 in.
Weight	
Weight Height	0.15 in.
Weight Height Length	0.15 in. 4.15 in.
Weight Height Length Width	0.15 in. 4.15 in. 3.55 in.
Weight Height Length Width Material	0.15 in. 4.15 in. 3.55 in. 6061-T6 Aluminum / Teflon Glass
Weight Height Length Width Material Finish	0.15 in. 4.15 in. 3.55 in. 6061-T6 Aluminum / Teflon Glass Skydrol Resistant Enamel
Weight Height Length Width Material Finish Connector	0.15 in. 4.15 in. 3.55 in. 6061-T6 Aluminum / Teflon Glass Skydrol Resistant Enamel

